VICTORIA
KERAMIK

FULL BODY

SALT & PAPER COLLECTION

300X300MM | 200X200MM


VICTORIA
KERAMIK

NON Rectified Tiles

300X300MM | 200X200MM


Our fullbody tiles are engineered for performance and aesthetics, offering unmatched strength from surface to core. unlike traditional tiles, full body tiles maintain consistent color and composition throughout their entire thickness, ensuring long-lasting durability even under heavy foot traffic



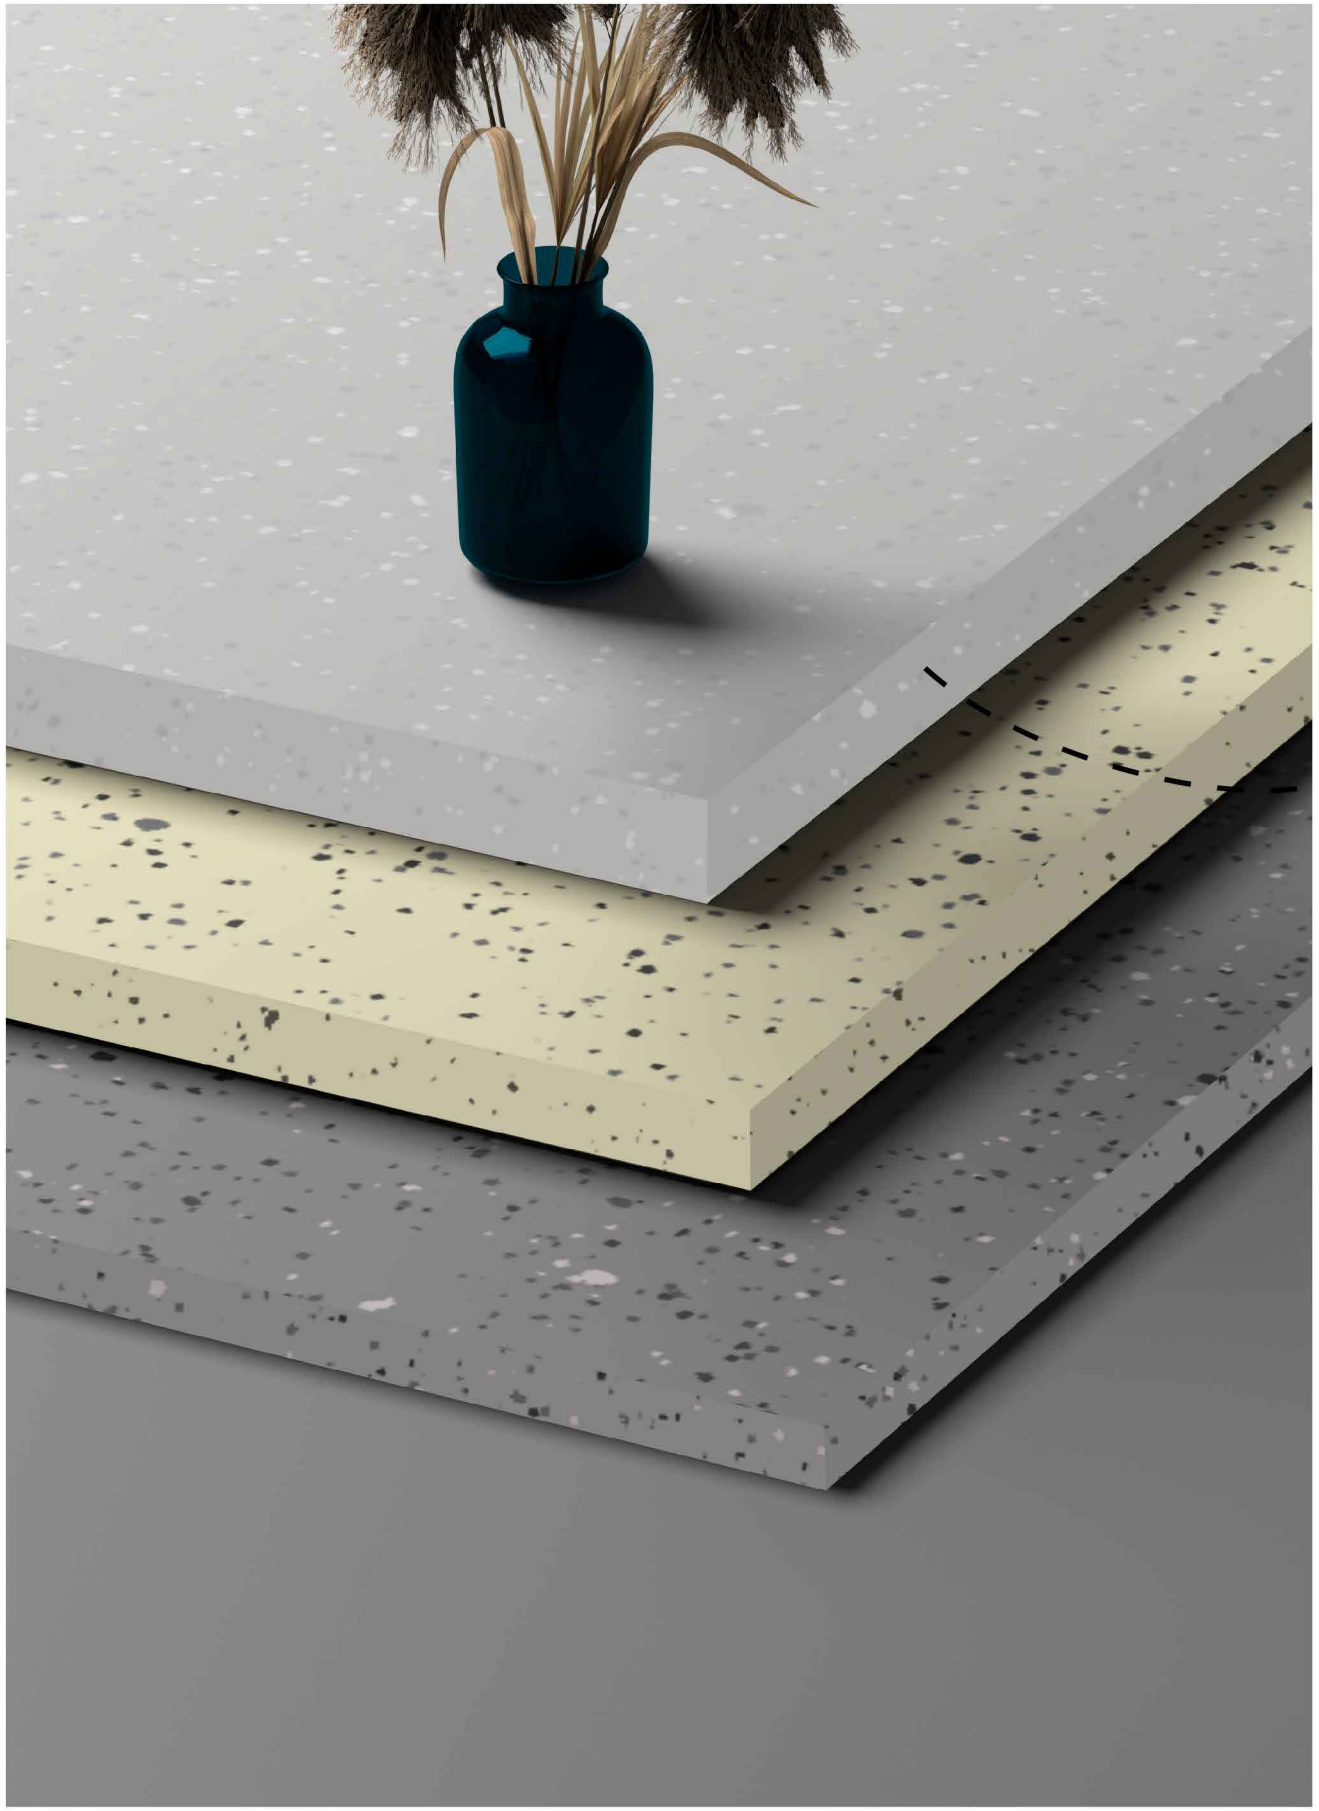

VICTORIA
KERAMIK

3 Thickness Available

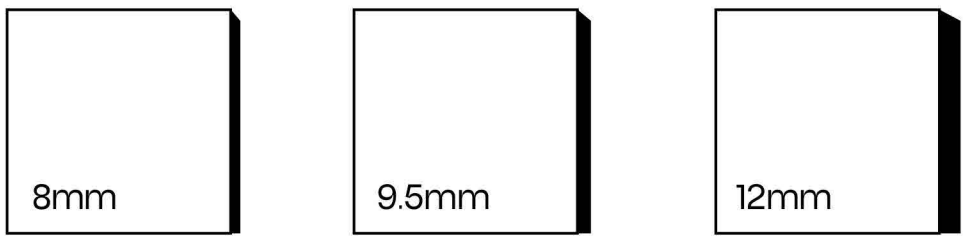


Our Full Body Tiles are crafted to meet a wide range of functional and design requirements. Available in 8mm, 9.5mm, and 12mm thicknesses, they offer flexibility for various applications from elegant residential floors to heavy-duty industrial zones.


INDEX

Possible
Application


Our tiles are designed not just for style but for smart functionality. From indoor elegance to outdoor durability we offer surface solutions for every corner of your world.











Mall & Shopping Complex




Airports & Railway Stations



Outdoor



Commercial Spaces



Garden Pathways



Indoor


VICTORIA
KERAMIK


FULL BODY

SALT & PAPER COLLECTION

COOL GREY

300x300 | matt

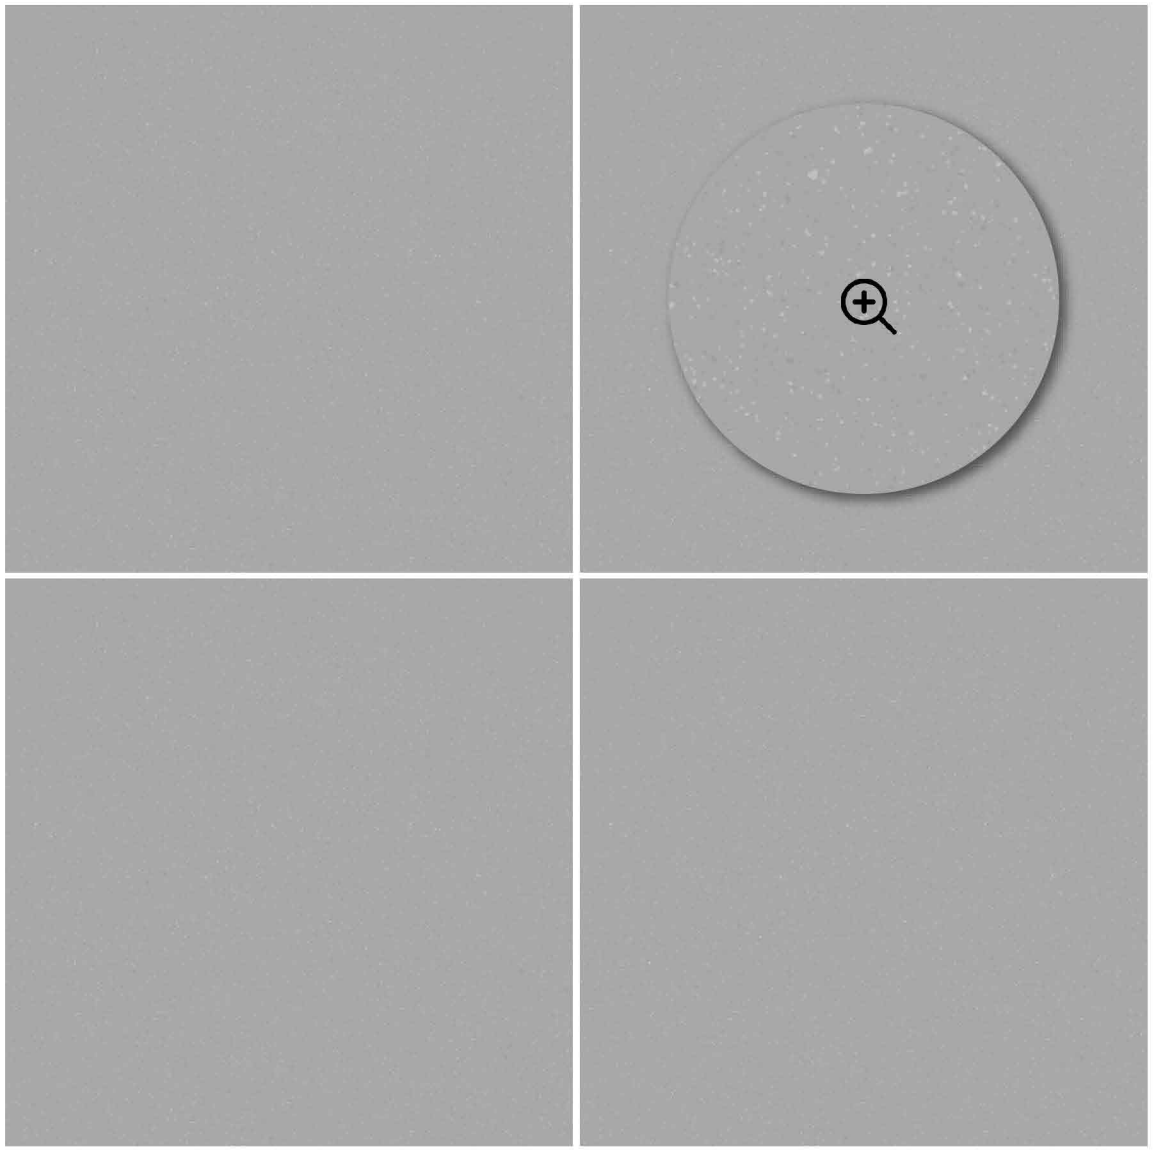

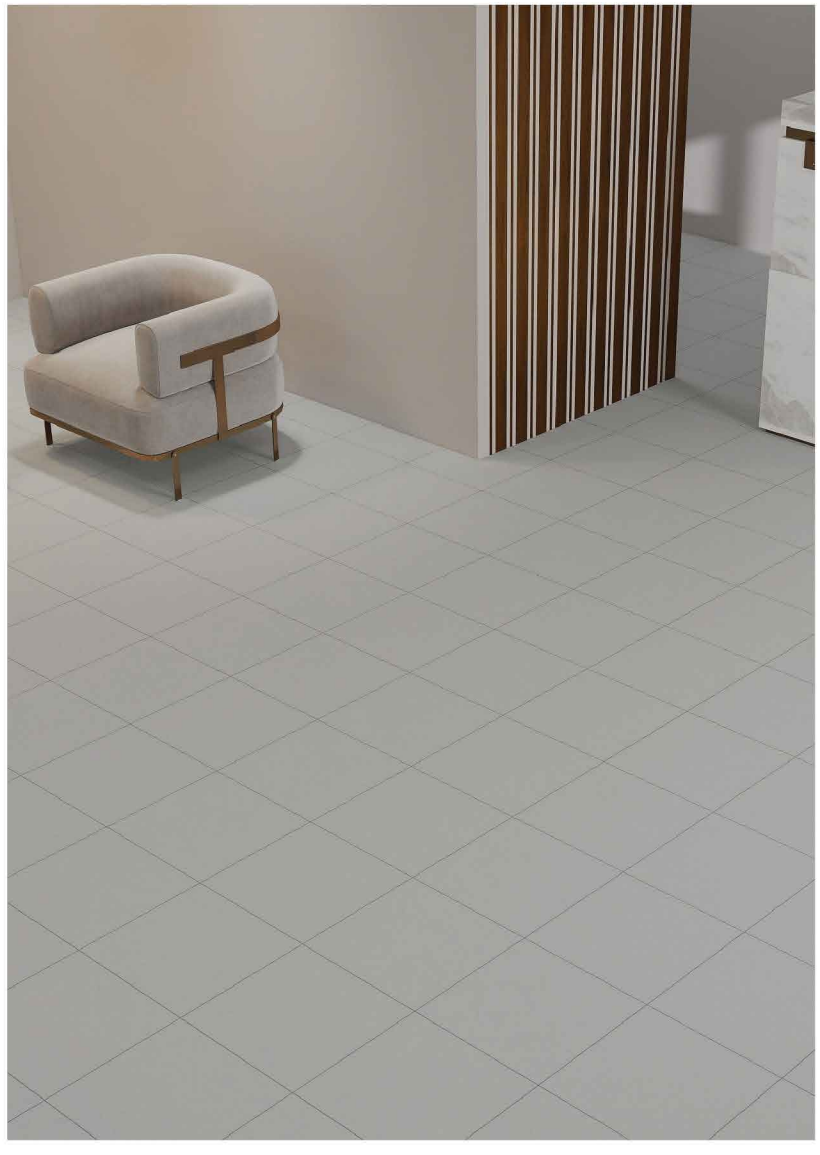

THICKNESS : 8mm, 9.5mm, 12mm



CHANEL
XXXLOGO

FULL BODY

SALT & PAPER COLLECTION

CRYSTAL GREY

300x300 | matt

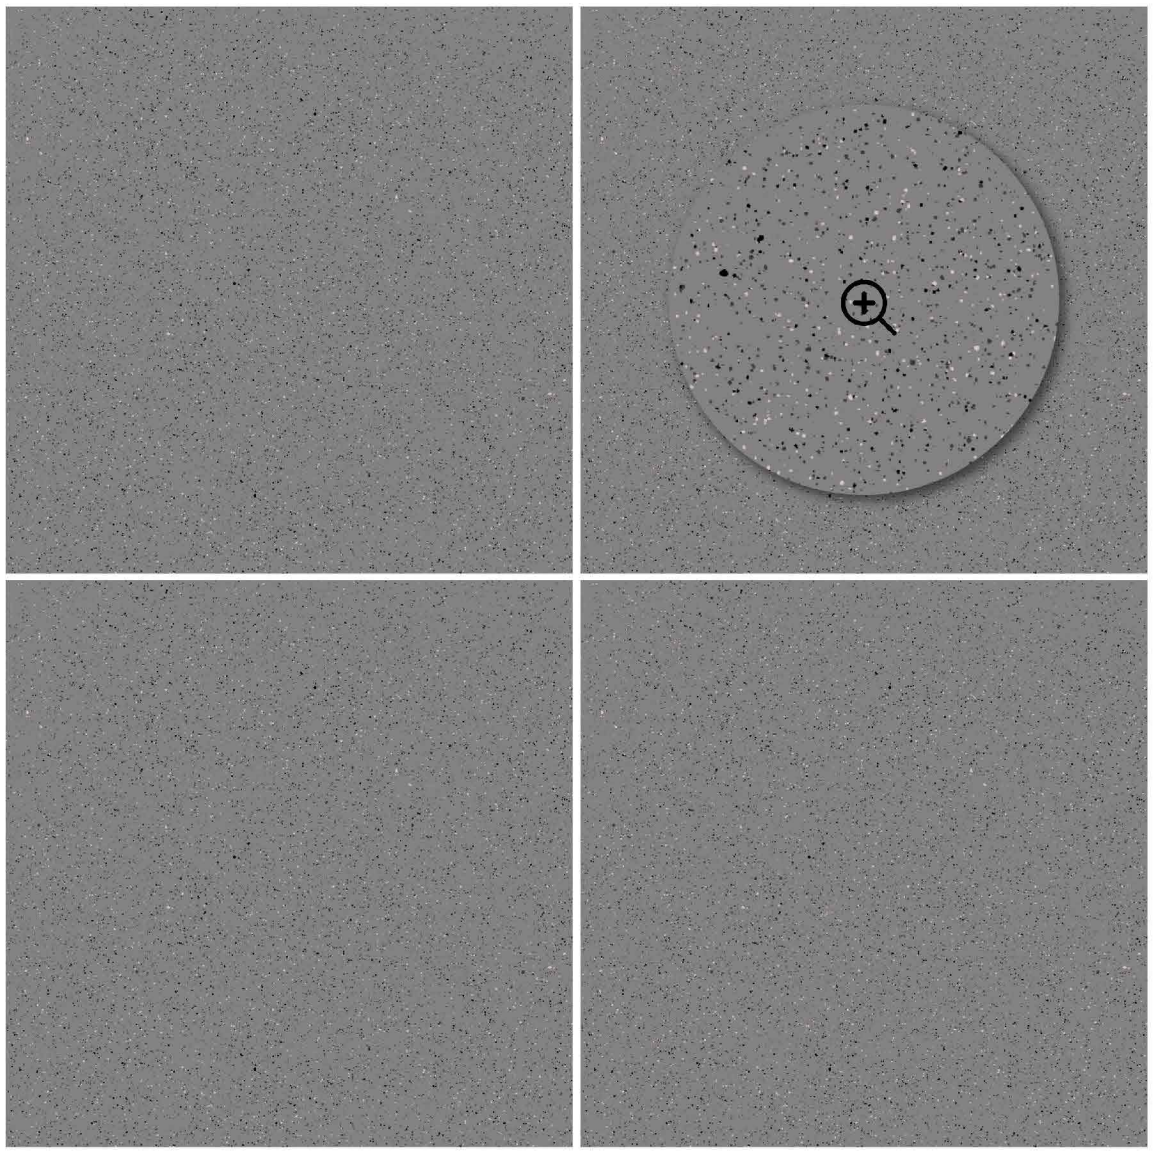



THICKNESS : 8mm, 9.5mm, 12mm





FULL BODY

SALT & PAPER COLLECTION

GRAPHITE

300x300 | matt

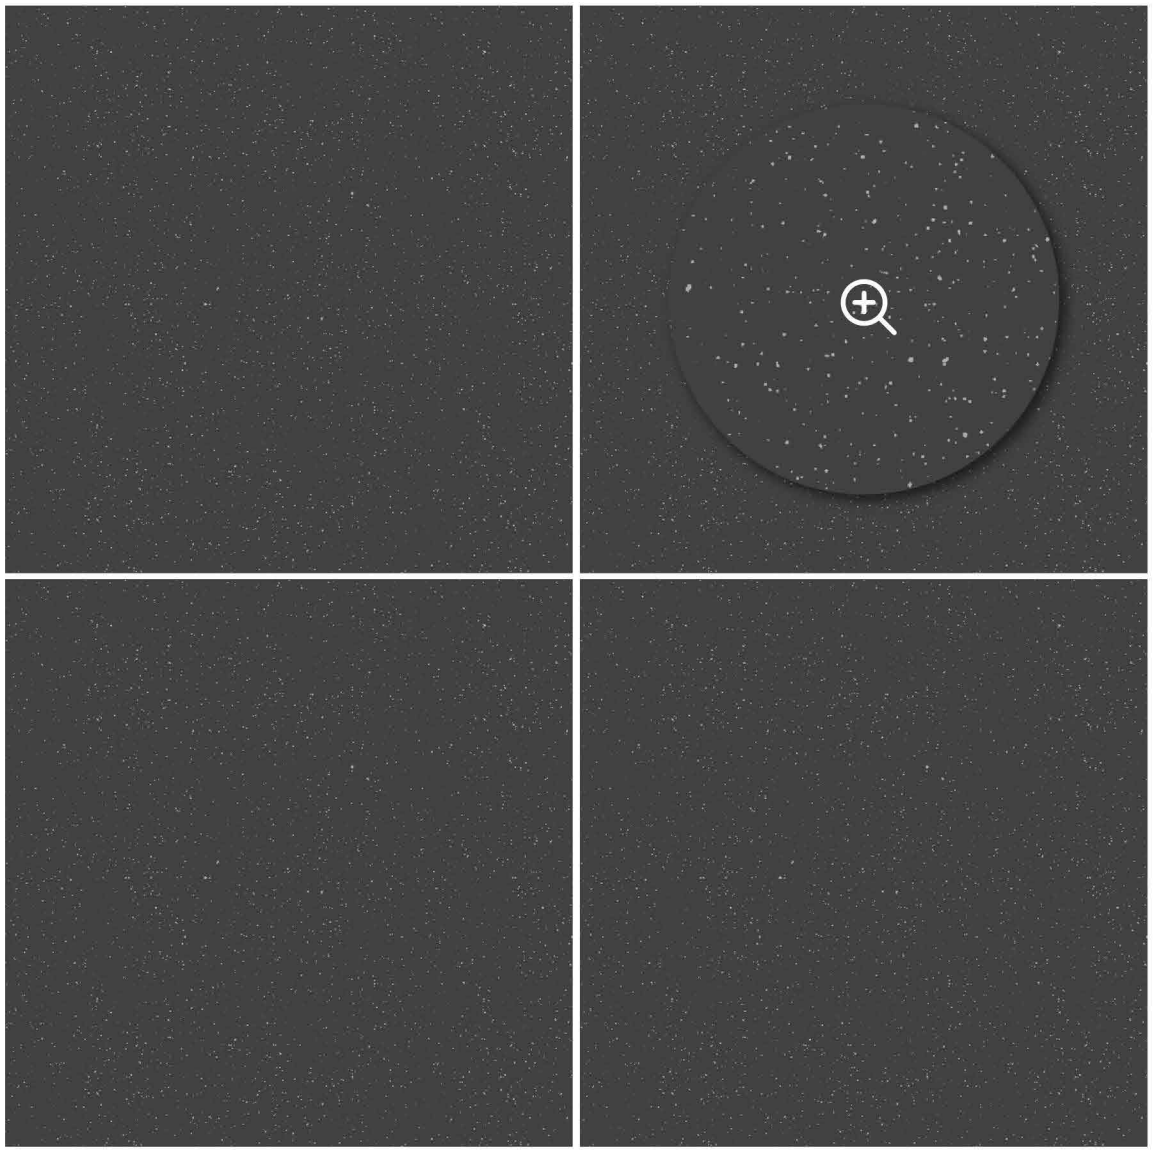

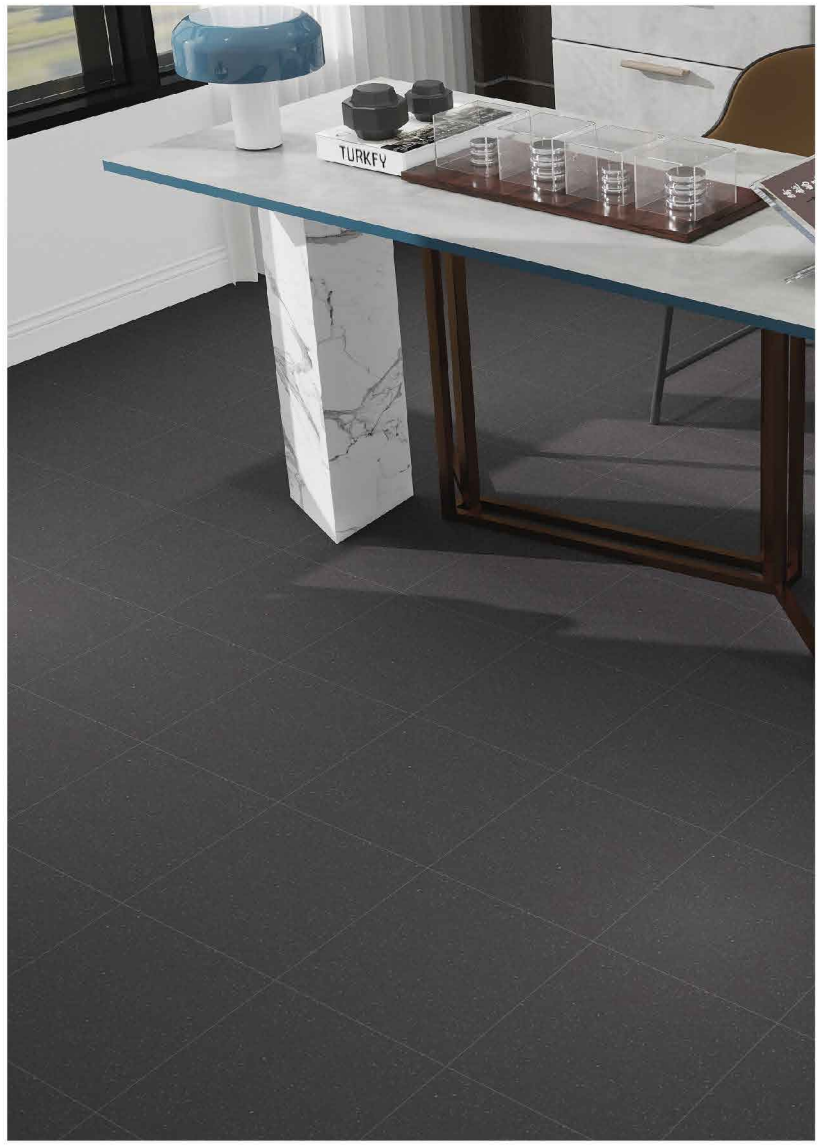

THICKNESS : 8mm, 9.5mm, 12mm



TURKFY


FULL BODY

SALT & PAPER COLLECTION

SANDSOTNE

300x300 | matt

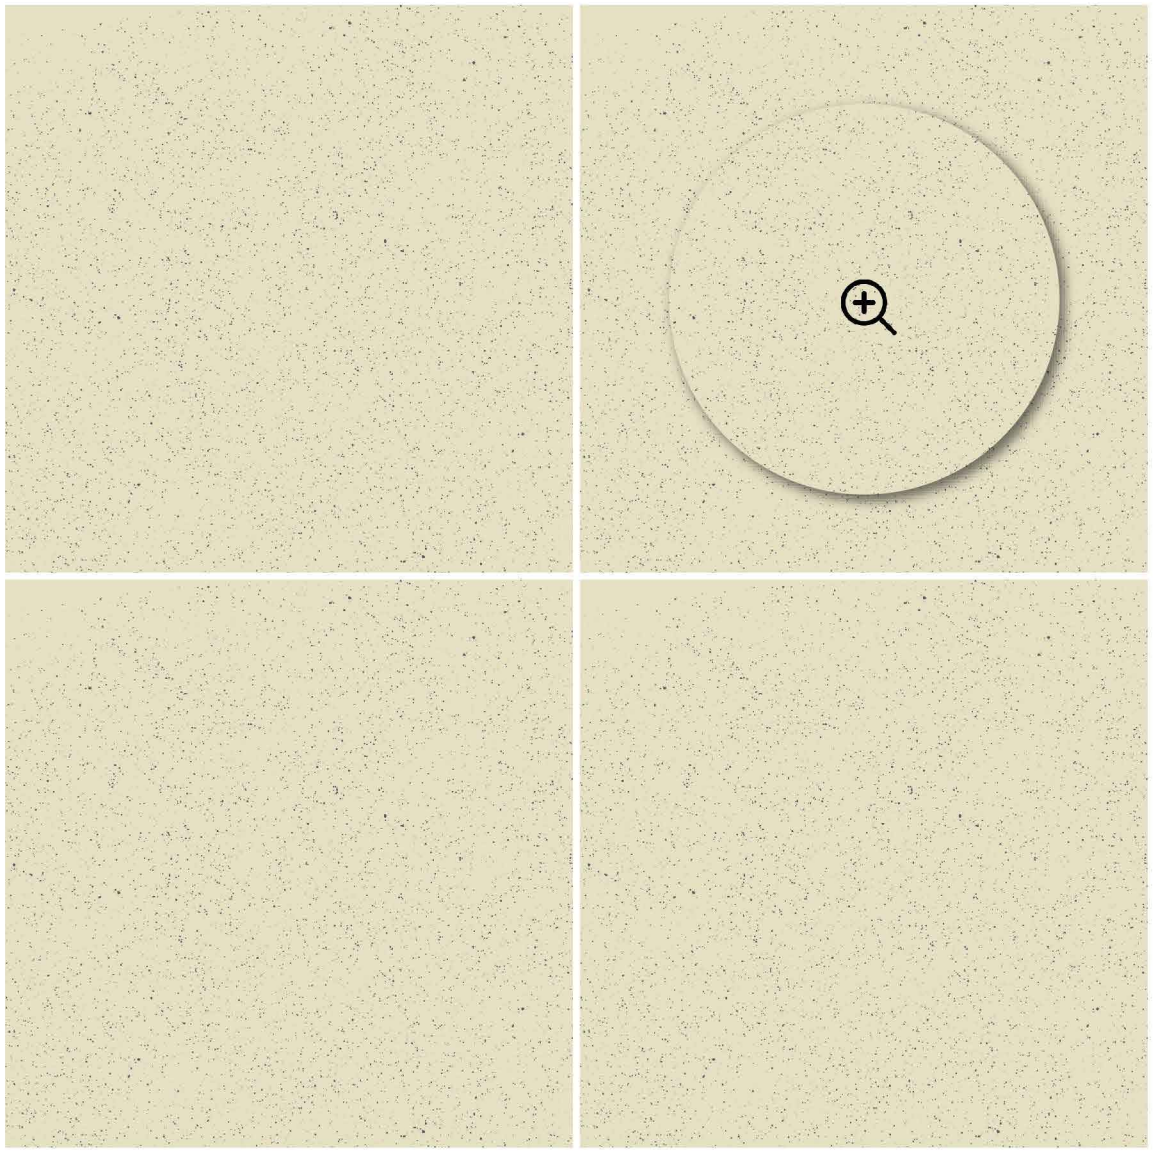

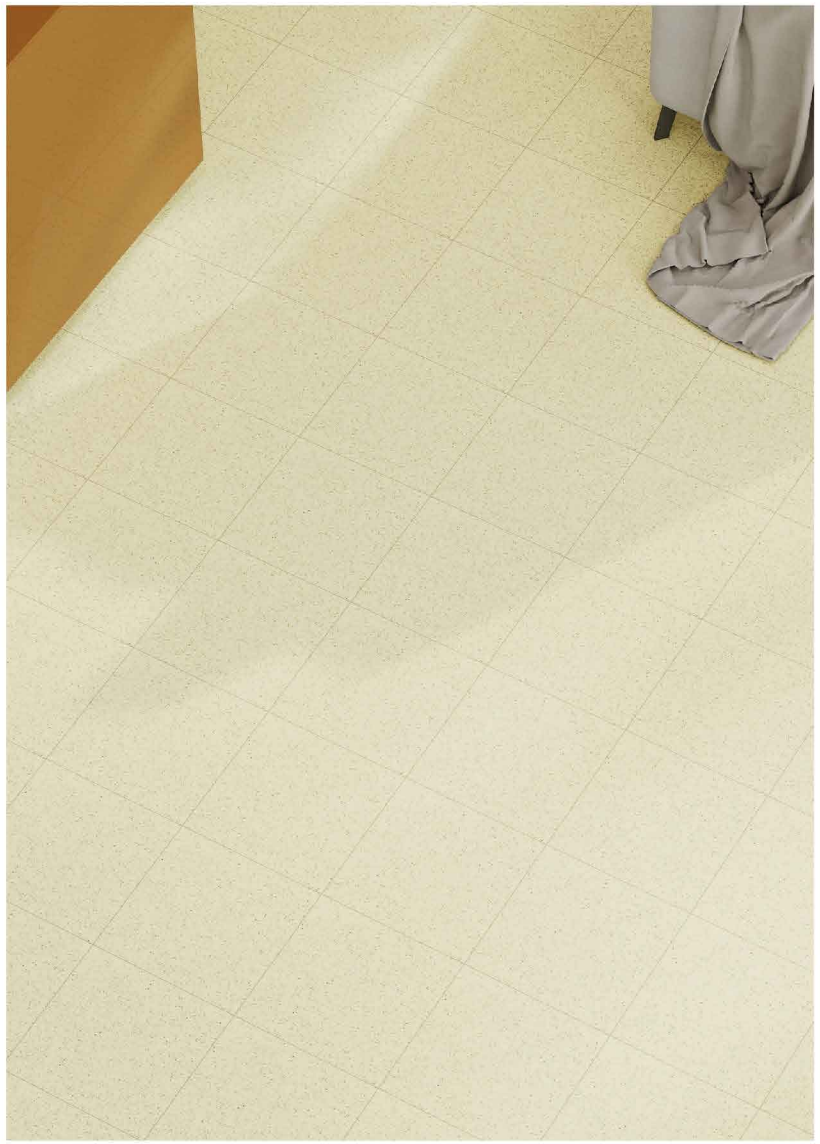

THICKNESS : 8mm, 9.5mm, 12mm

TECHNICLE SPECIFICATION OF 300X300X8 MM

CHARCTERISTICS	EURO STANDARD	OUR VALUE
DIMENSION & SURFACE QUALITY		
1. Deviation In Length & Width	.±1.2 mm	.±0.9 mm
2. Deviation in Thickness	.±0.6 mm	.±0.3 mm
3. Straightness of Sides	.±0.5%	.±0.05%
4. Rectangularity	.±1.2 mm	.±0.8 mm
5. Surface Flatness	.±0.5%	.±0.3%
6. Surface Quality	Min.95%	Min.96%
PHYSICAL PROPERTIES		
1. Water Absorption	0.08%	0.05%
2. Modules of rupture (M.O.R)	350 kg/cm2	573.6 kg/cm2
3. Breking Strength	1300 N	1734 N
4. Scratch Hardness (Mohs)	Min.5	Min.6
5. Surface Abrasion	class 2	Class 3
6. Crazing	4 Cycle	No Crazing Upto 4 cycle
CHEMICAL PROPERTIES		
1. Staining Resistance	Min. Class 1	Resistant To all Acids and Alkalies & Household Chemicals, except Hydro Flouric Acid PASS
2. Household Chemical	Min. Class AA	
THERMAL PROPERTIES		
1. Thermal Shock Resistance	Resistance To 10 Cycle	PASS
2.Thermal Expansion	Max. 9E-06	PASS


VICTORIA
KERAMIK

VICTORIA
KERAMIK


PACKAGING DETAILS

SR. NO.	SIZE IN MM	THICKNESS IN MM	PCS PER BOX	SQFT PER BOX	SQM PER BOX	WEIGHT PER BOX
01.	300X300 (UNRACTIFIED)	8	12	11.62	1.08	19 KG APPROX
02.	300X300 (UNRACTIFIED)	9.5	10	9.68	0.90	19 KG APPROX
03.	300X300 (UNRACTIFIED)	12	8	7.75	0.72	19 KG APPROX
04.	200X200 (UNRACTIFIED)	8	25	10.76	1.00	17 KG APPROX
05.	200X200 (UNRACTIFIED)	9.5	20	8.61	0.80	17 KG APPROX
06.	200X200 (UNRACTIFIED)	12	16	6.89	0.64	17 KG APPROX


THICKNESS : 8mm, 9.5mm, 12mm

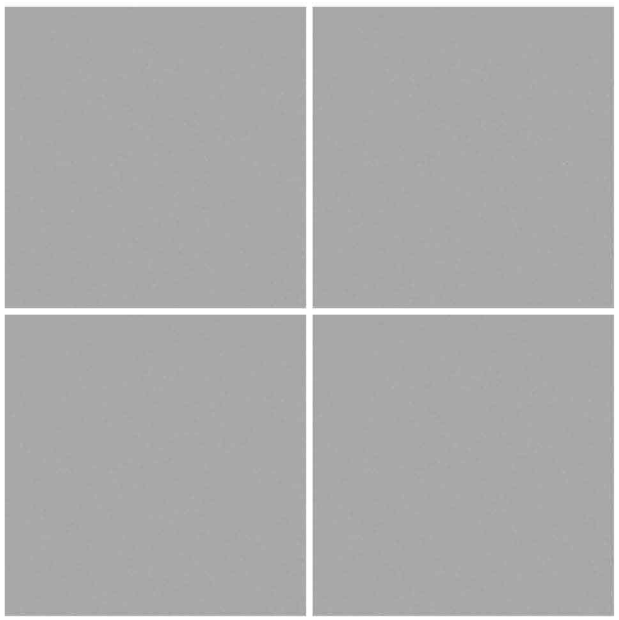


COOL GREY

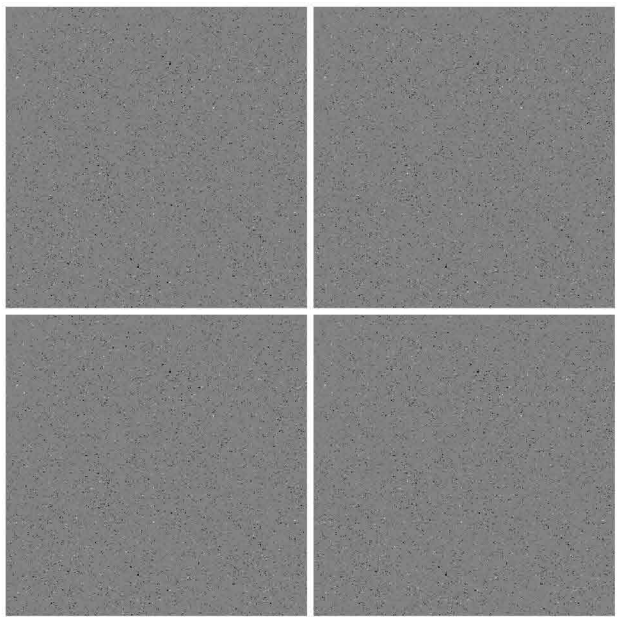

CRYSTAL GREY

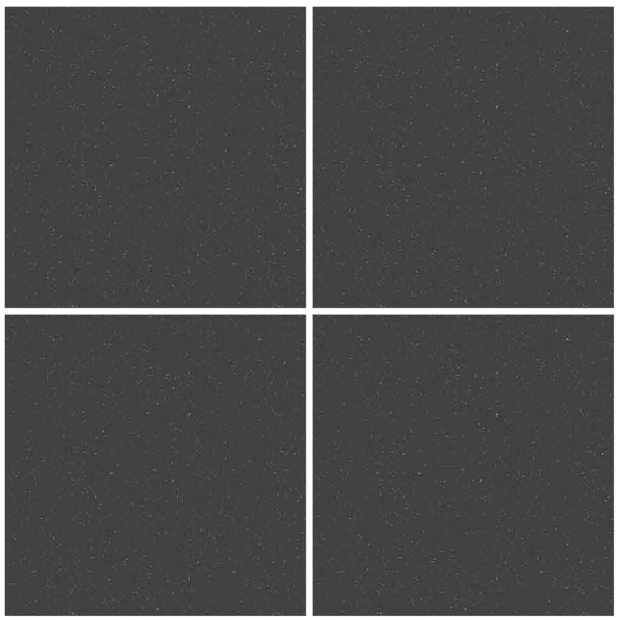

GRAPHITE

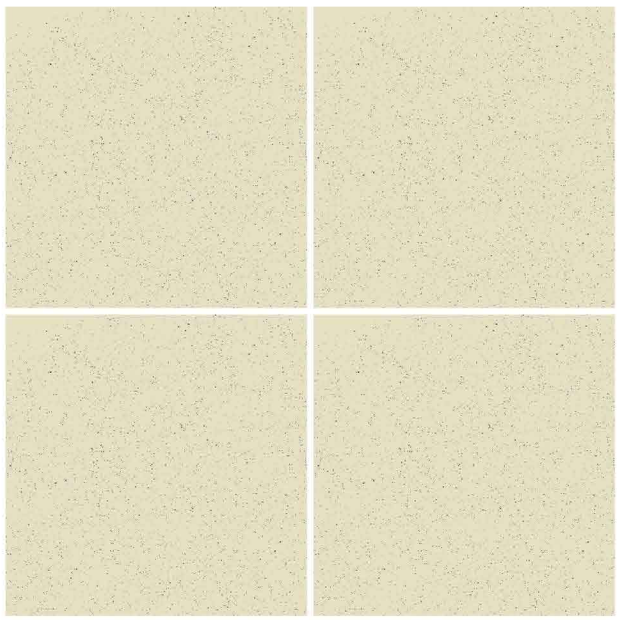

SANDSTONE

NON Rectified Tiles

COLLECTION AVAILABLE IN

300X 200X
300MM, 200MM

VICTORIA

KERAMIK